


Westfield Select IP67 D-Sub Female Front Panel Mount Straight PCB Mount Type

IP67 D-Sub Female Front Panel Mounting - Straight PCB Mount Type

Machined / Turned Pin

Plating: Gold Flash
Other Options Available

Locking via 440unc Screws

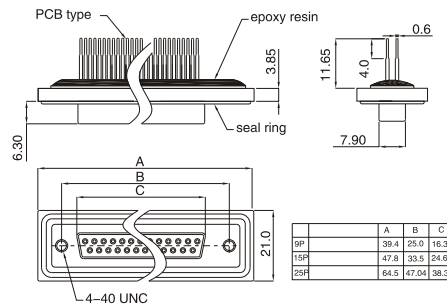

General information

Ambient temperature:	-25 °C ~ + 70 °C
Connector insert:	PBT+GF
Connector contacts:	Brass gold plated
Coupling nut/screw:	Brass nickel plated
Seal / O-ring:	FKM

Insulation resistance:	≥ 1000MΩ
Forward resistance :	≤ 10mΩ
Shielding:	Unavailable
IP rating:	IP 67 in locked condition

Part Numbers

9way = IP67DSUBFSFPM-SPCBMT

15way = IP67DSUBFSFPM-SPCBMT

25way = IP67DSUBFSFPM-SPCBMT

Electrical data & Mechanical data

Contacts	Contacts	Rated current	Voltage	
			A/C	D/C
D-Sub 9P	PCB version	5A	300V	300V
D-Sub 15P	PCB version	5A	300V	300V
D-Sub 25P	PCB version	5A	300V	300V

Remarks

For Other Gold Plating Options / Mating Cycles Please Contact Sales Office

Competitors Cross Reference Service Available