


# Westfield Select Cables - IP67 Mini Din Female Front Panel Mount

## IP67 Mini Din Female Front Panel Mount

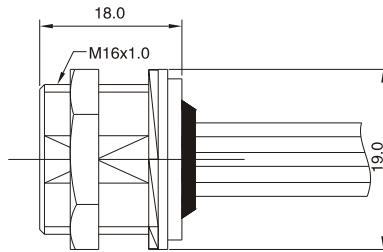

Customer to Specify Cable Length and Colours

### General information

Ambient temperature:	-20 °C ~ + 80 °C
Connector insert:	PBT
Connector contacts:	Brass with silver plated
Coupling nut/screw:	PA+GF
Seal / O-ring:	FKM

Insulation resistance:	≥ 20MΩ
Forward resistance :	≤ 20mΩ
Shielding:	Available
IP rating:	IP 67 in locked condition

Westfield Part Number: IP67MDINFPM-\*\*XXXXXX

### Electrical data & Mechanical data

\*\* refers to pins number

Contacts	Rated current	Voltage		Wire gauge / size		Wire insulation	Wire ending & length
		A/C	D/C	AWG	mm <sup>2</sup>		
3 pins 	1.5A	300V	300V	24AWG	0.25	PVC wire or customized	Customized wire ending and length
4 pins 	1.5A	300V	300V	24AWG	0.25		
5 pins 	1.5A	300V	300V	24AWG	0.25		
6 pins 	1.5A	300V	300V	24AWG	0.25		
7 pins 	1.5A	300V	300V	24AWG	0.25		
8 pins 	1.5A	300V	300V	24AWG	0.25		
9 pins 	1.5A	300V	300V	24AWG	0.25		